

**DELTA**  
MOBILI ITALIANI MODERNI



**Pavimenti LVT  
LVT Flooring**

Uffici | Cucine | Contract



LVT



# LVT different types

## **LVT Peel&Stick**

Peel&Stick is easy to install. You can install yourself after learning from product install instructions, so it is friendly to DIY lovers. If you are building material supermarket, or shop online, LVT Peel & Stick is a god choice. You don't need to hire professional installation team, customer can buy and install themselves.



## **LVT Click**

Click LVT is a kind of floating installation with click system. It is fast and easy. Without glue, it is also easy to remove it. Compared with SPC flooring, it has better foot-feeling and sound absorption. At the same time, the price is also higher. Suitable for high level commercial use.



## **LVT looselay**

Loose lay thickness ranges om 4.5mm to 6mm. Itsf weight will help it keep stable on the ground with glue. There is also a anti-moving layer on the backing. So loose lay installation and remove are the most simple. It makes loose lay flooring can repeat usage. At the same time, higher thickness, give you better foot-feeling and better sound absorption.

So it is suitable for raised floor,you can li it up and fix the wiring below.

It is also suitable for spaces like ofices, fair halls decoration, and other places. If you want to change the floor decoration simple and quickly.



## **LVT dry back**

Dry back LVT is suitable for commercial and residential application. For example home, hotel, shopping mall and so on. It is economical. But its installation need glue and self-leveling, so a professional work team would be necessary. Therefore, distributor and project contractor like it who has their own work team. It is easy to keep stock, and suitable for most situation.



A stack of several dark wood-grain LVT planks is shown, resting on a surface of the same material. The planks are arranged in a slightly overlapping manner, showing their thickness and the texture of the wood grain. The lighting is soft, highlighting the natural-looking patterns of the wood. The text 'LVT TECHNICAL DATA SHEET' is overlaid in red at the bottom of the image.

**LVT TECHNICAL  
DATA SHEET**

PRODUCT INFORMATION		
Item	LVT	
Plank Size	6"X36"/7"X48"/9"X48"/9"X60"/12"X24"	
Thickness	2-5mm (+/- 0.05, unstressed)	
Wear Layer Thickness	0.1-0.5mm (+/- 0.05, unstressed)	
Finish	UV Coating	
Emboss	Deep embossing/EIR embossing/leather embossing/smooth embossing	
Installation	Glue down/Loose lay/Peel&Stick/Click	
Floor heating installation	Water underfloor heating is ok, electric heating is NOT ok.	
Warranty	0.3mm wear layer: 20 years residential/15 years commercial 0.5mm wear layer: over 20 years	
REFERENCE	NORMS	RESULT
Tolerance of Length	EN 427	≤ 0.15%
Tolerance of Width	EN 427	≤ 0.15%
Tolerance on the squareness	EN 427	0.05mm
Determination of stability	EN 434	<0.15%
Abrasion Resistance	EN 660-2	Group T
Thermal conductivity	EN12524	0.11W/(M.K)
Reaction to Fire	EN 13501-1	Bf1-S1
Castor Chair Resistance	EN 425	Pass
Classification	EN685	Class23 for residential Class33 for commercial
Stain Resistance	EN423	Not affected
VOC	ISO 16000	VOC A+
Slip Resistance	DIN51130	Class R9/R10
Residual Indentation	ISO24343-1:2007	≤ 0.1 mm
Chemical Products Resistance	EN423	Pass
Ortho-Phthalates	US EPA 3550c:2007	None
PCP	EN 12673	None
Formaldehyde Emission	EN717-1	E1
Light fastness	EN ISO 105 B02	Blue wool scale: Stage ≥ 6









# LVT Standard Finishes













# APPLICATION

---



## *Easy Clean*

Diamond-Core™ coating tech greatly improves the stain-resistant ability by changing the formula. It is difficult for stains to adhere to the floor surface, making the floor easier to clean.

---



## *Extreme Stability*

Mineral powder is added to the product to ensure that the floor has a higher stability, to improve resistance to changes in temperature.

---



## *Soundproof*

The special thickened sound insulation pad allows you to freely move in your own room without affecting the lives of neighbors.

---



## *Antibacterial*

COVID-19 is destroying our lives. In order to return our lives to normal ASAP, and to protect the health of our family, DELTA has specially developed a new antibacterial coating that can effectively reduce the number of bacteria on the flooring.

**The special thickened sound insulation pad allows you to move freely in your own room without disturbing the neighbors.**









# APPLICATION

---



## *Pet Free*

More than 6 in 10 of all households have a pet, but they can be tough on floors. One of the biggest issues with pets and floors is scratching, especially if you don't keep nails trimmed.

Let Diamond Core coating protect your flooring well, even with a scratchy, furry, accident-prone pet at home, it can still be possible to have beautiful floors. You just need to find the right type!

---



## *100% Waterproof*

Flooring from DELTA provides the look of real wood flooring without the worry of damage or staining from water and moisture and counteracts the accidents that happen in our busy lives. LVT flooring is not just water resistant flooring - it's 100% waterproof flooring for any room in your home.

---



All vinyl flooring are made of 100% virgin material, without heavy metals, formaldehyde free, and phthalates free.

---



## *Anti-scratch*

Diamond-Core™ technology greatly improves the scratch resistance and the service life of the flooring. You can freely move around the house without worrying about scratching the floor.

**All vinyl flooring are made of 100% virgin material, without heavy metals, formaldehyde free, phthalates free.**

**Be more environmentally friendly and protect the health of yourself, your family, and your community.**

# Wood Color Sizes

180 x 1230mm

228 x 1230mm

6" x 36"

7" x 48"







9" x 48"

9" x 60"

9" x 70"



# Stone Color Sizes

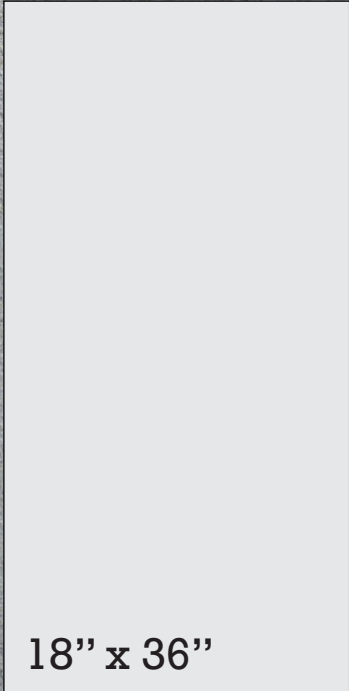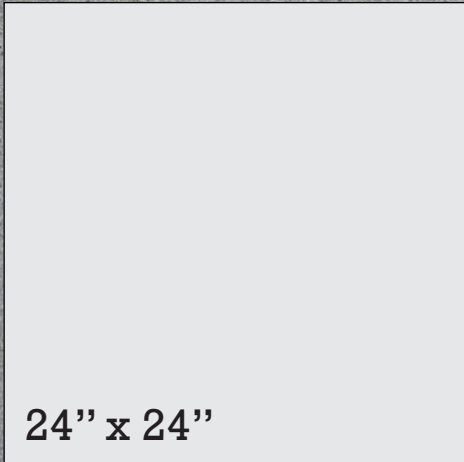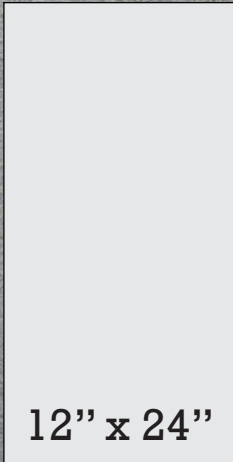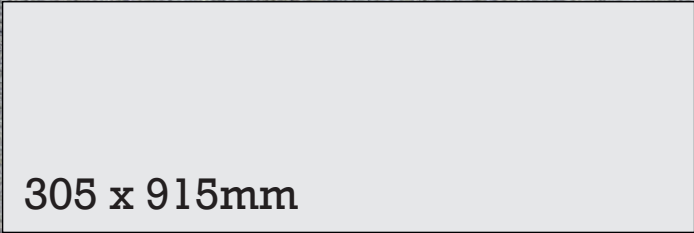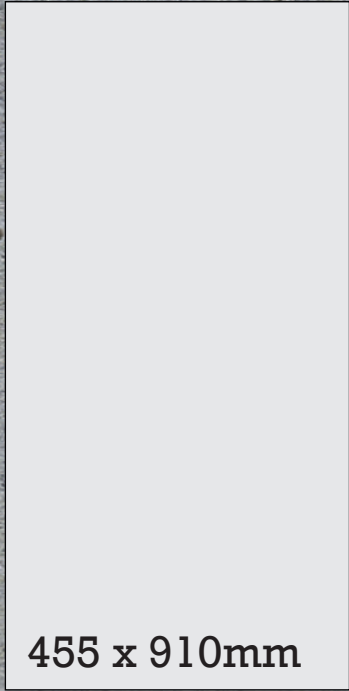



Certificate





**DELTA Mobili Srl.**

**T. +39.011.0120 420**

**F. +39.011.0703 960**  
**info@delta-mobili.it**

**Via Bertolotti, 7**  
**10121 Torino, Italia**  
**export@delta-mobili.it**  
**www.delta-mobili.it**

**REA TO - 1210606**  
**P.Iva 11401470015**

**Local Dealer:**